

Game Changer Commercial Dehydrator/Smoker		
Model: GC20V2	7930 N 700 E Tippecanoe, IN. 46570 USA Phone: 574-353-7855 www.gamechangersmoker.com sale@gamechangersmoker.com	Project Name: _____ Location: _____ Item #: _____ Qty: _____ Model #: _____
	AIA# _____ SIS# _____	



- Standard Features**
- No installation costs
 - Does Not need to be placed directly under a hood
 - NO gas line needed
 - Cabinet style Construction
 - 4 HD casters (2 locking)
 - 9 Pre-programmable Touch Screen Settings
 - 3 Strategically Placed Convection Fans which result in NO hot zones and NO cold zones
 - Scientifically designed and engineered Smoke Generator with two US patents
 - Natural Moisture Retaining design offers user an average of up to 10% GREATER product yield
 - COMPLETE Cooking Control in EACH use
 - PERFECT Product Consistency EACH time



MADE IN USA

LIMITED WARRANTY
 Norris Thermal Technologies warrants this product from manufacturer defect and workmanship for a period of **12 months** from the original date of purchase.

Specification
• Certified to NSF Standards by UL
• UL rated for Marine Vessels over 65'
• Heavy Duty Food Service Grade 304 Stainless Steel
• 208-240V/ Single Phase/ 30 Amp with ground
• 50" Wide / 73" Tall / 31" Deep
• 65 sq ft of Cooking Space
• 2" Insulated Walls
• Temperature Capabilities from Ambient to 280 degrees
• Removable Standard 18" x 26" Bakery Rack with 20 Shelves and 3" spacing
• NEMA 14-30P Power receptacle


GAME CHANGER®

COMMERCIAL SMOKER

WWW.GCSMOKER.COM

GC20V2

PRODUCT SPECIFICATIONS

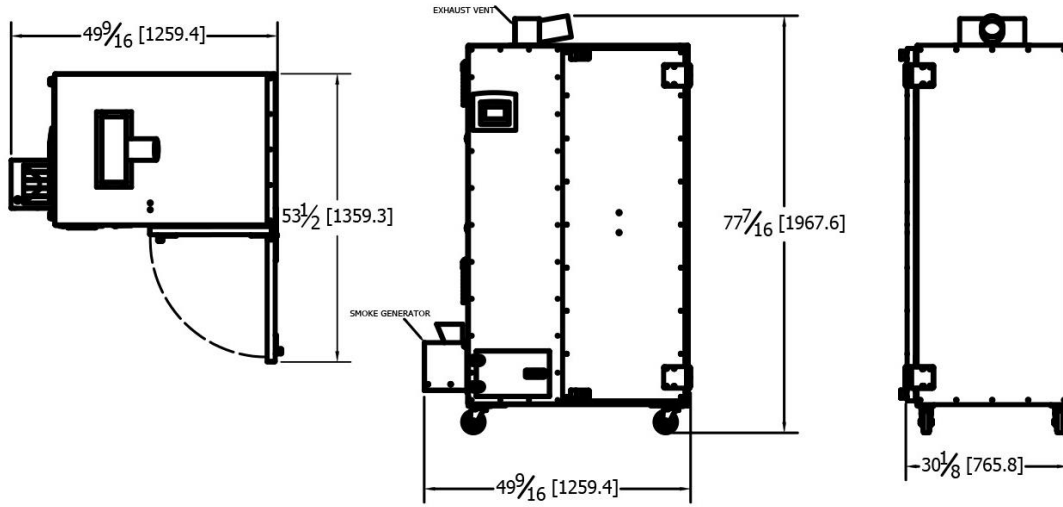

Model #	OVERALL SIZE			VOLTS	AMPS	WEIGHT	PHASE
	WIDTH	DEPTH	HEIGHT				
GC20V2	50"	31"	73"	240	30	800 LBS.	SINGLE W/ GROUND

MODEL #	Shipping Crate Size			WEIGHT
	WIDTH	DEPTH	HEIGHT	
GC20V2	50	48	84	1200 LBS

INSTALLATION

Install the unit at least 2" from the wall and at least 6" from other-heat producing equipment. Any wall, surface, cabinet, table, etc. in close proximity to the equipment should be made of non-combustible materials with proper thermal insulation.

-Power connection cord with NEMA 14-30P plug 3 wire (with ground) is provided. Licensed electrician is required to wire outlet plug with correct voltage an amperage and connect the power plug and turn on the Game changer for the first time. Main power disconnect is provided which also acts as an emergency stop.

-Install under or adjacent to a Type 2 hood system for evacuation of the smoke. Flexible vent is provided if smoke is adjacent to the hood.

-Provide clearance for removal of smoke generator and access to the electric control panel.

-To prevent accidental movement, Lock caster (two caster are locking) when plugged into power.

-Install on a level and non-combustible surface.